


Features :

- ▶ 4 Digits, 7 Segment LED White display
- ▶ Scalable analog input
- ▶ Voltage / Current Input type
- ▶ 85 to 270V AC/DC Supply
- ▶ Compact size
- ▶ IP65 for faceplate


Technical specifications

Display specifications	
Display	4 Digits 7 Segment LED single display
Height of display	0.56"
Input specifications	
Inputs	Voltage : 0 - 10V DC ; Current : 0 - 20mA & 4 - 20mA DC
Resolution	Decimal point position selectable : 1 / 0.1 / 0.01 / 0.001
Input filter (FTC)	0.2 to 9.9 sec
Indication accuracy	±0.5% of F.S. ± 1 digit (F.S. = Full Scale)
Auxiliary supply specifications	
Supply voltage	85 to 270V AC/DC (AC : 50/60 Hz)
Power consumption	5 VA max @270V AC
Environment specifications	
Temperature	Operating : 0°C to 50°C (32 to 122°F); Storage : -20°C to 75°C (-4 to 167°F)
Humidity (non - condensing)	95% RH
Mechanical specifications	
Mounting	Panel
Weight	100 gms

Terminal connections

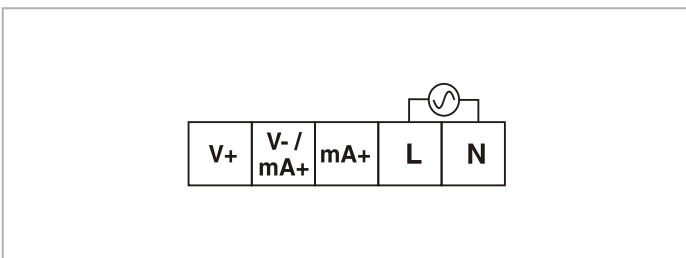

Dimensions (All are in mm)

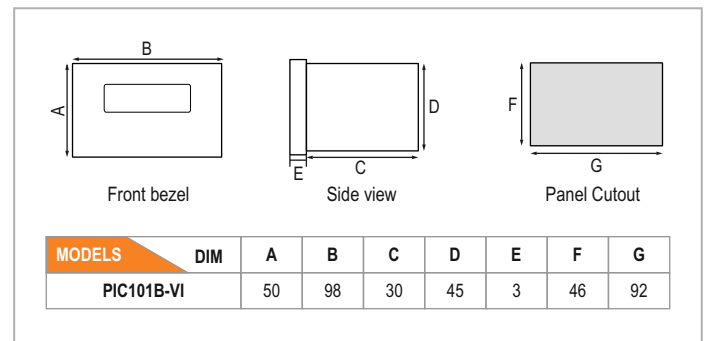

Ordering information

Product code	Supply voltage	Certification
PIC101B-VI	85 to 270V AC/DC	---